



RECEIVED

SEP 02 2004

OFFICE OF PETITIONS

Patent Office  
Canberra

I, JULIE BILLINGSLEY, TEAM LEADER EXAMINATION SUPPORT AND SALES hereby certify that annexed is a true copy of the Provisional specification in connection with Application No. PQ 6887 for a patent by GROUND BREAKING INNOVATIONS PTY LTD as filed on 13 April 2000.

I further certify that pursuant to the provisions of Section 38(1) of the Patents Act 1990 a complete specification was filed on 12 April 2001 and it is an associated application to Provisional Application No. PQ 6887 and has been allocated No. 35201/01.



WITNESS my hand this  
Sixteenth day of July 2004

A handwritten signature in cursive script, reading "J. Billingsley".

JULIE BILLINGSLEY  
TEAM LEADER EXAMINATION  
SUPPORT AND SALES

AUSTRALIA

---

*Patents Act 1990*

---

## **PROVISIONAL SPECIFICATION**

Invention Title:

**"IMPROVEMENTS IN DRAG LINE BUCKET CONTROLS"**

The invention is described in the following statement:

## IMPROVEMENTS IN DRAG LINE BUCKET CONTROLS

THIS INVENTION is concerned with improvements in bucket control systems for dragline excavators.

The invention is particularly, although not exclusively,  
5 concerned with bucket dump control systems for dragline excavators.

A typical dragline bucket is controlled by three cables or 'ropes' - a hoist rope, and a drag rope and a dump rope.

It is noted that where a singular 'rope' is referred to herein, this may, and often does, refer to two or more equalised  
10 ropes travelling uniformly and performing identical functions.

The hoist rope is pivotally connected via a load equalizer and hoist chains to trunnions towards and on opposite sides of the rear of the bucket and extends over a sheave at the tip of the excavator boom to the drum of a winch.

15 The drag rope is coupled via a drag linkage to draw chains in turn coupled on opposite sides of the open mouth of the bucket. Also coupled to the drag linkage is a dump control cable which extends over a dump sheave attached to the hoist load equalizer and back to a mounting lug on a transverse arch extending  
20 over the open mouth of the bucket or to the sides of the bucket front. The drag rope extends unsupported between the drag drum of the winch and the drag linkage coupled by draw chains to the front of the bucket.

It is widely held that dragline buckets possess three degrees of freedom - the x and y axes and the carry angle of the bucket.

5 In a conventional two rope dragline, the vertical and horizontal positions of the bucket is controlled by the paid out length of the hoist rope and the drag rope. The bucket carry angle is controlled implicitly by the relative lengths of the draw chains, hoist chains, dump rope and connecting links, and the positional masses of the bucket, rigging and payload.

10 Due to the geometric balance, the carry angle reduces as the bucket moves from the base of the boom to vertically under the boom point. The maximum payload carried by the bucket occurs for only a narrow band of carry angle, with reduced payloads for carry angles higher and lower than this band. Accordingly, the carry angle  
15 is at best a compromise between the bucket geometry rigging design and operational requirements.

The dump zone for the bucket is determined by trigonometric stability of the loaded bucket. Generally speaking, at a predetermined distance along the boom, usually more than two thirds  
20 of its length, the tensions in the drag rope, draw chain and dump rope, reduce to the point where the dump rope force is no longer sufficient to support the front of the bucket, which rotates about the hoist trunnions to dump the bucket load.

The compromise in bucket carry angle means that efficiencies in the excavation process are lost by bucket spillages, particularly when the bucket is hoisted either close to the base of the boom or more than halfway along the boom. Another limitation of such a rigging design is that generally it is not possible to dump either inside or outside the implicit dump radius controlled by the geometric balance mentioned after.

A prior art two rope - bucket rigging system is described generally in Australian Patent Application No 28097/99 which relates to an improved bucket rigging for a conventional two rope system.

Australian Patent Application No 34502/89 proposes a three cable bucket control system having two hoist ropes and a drag rope. In this proposal, the effective paid out length of the two hoist ropes are independently controllable. This system suggests three controllable degrees of freedom and avoids the compromises with the bucket carry angle of the two rope systems.

The hoist ropes extend over respective sheaves at the tip of the boom, one such hoist rope being coupled via hoist chains to the hoist trunnions of the bucket. The other hoist rope is coupled to the mounting lug on the transverse arch over the mouth of the bucket.

The bucket is moved from a loaded transport position to a dump position by shortening either of the rear mounted or front

mounted hoist ropes relative to the other to achieve load dumping from the open mouth of the bucket or rearwardly through the selectively operable hatch. Independent control of the paired hoist ropes is achieved by a radial arm pivoted on the boom support tower.

5 The radial arm has a sheave mounted on the free end over which one of the hoist ropes passes. A hydraulic cylinder is actuable to move the radial arm and sheave whereby one hoist rope is shortened relative to the other.

When the bucket is in a horizontal attitude, the bucket  
10 support is represented by a triangulated support structure having one support point at the tip of the boom, another support point at the hoist trunnions, and the third support point at the mounting lug on the bucket arch.

The three rope system is potentially superior to the two  
15 rope system in that its effective excavation radius is greater and it permits a greater degree of selectivity in the dump zone position. Also, the spillage resulting from carry angle variations during carrying can be reduced by reducing the angle variation.

Again, while generally effective for its intended purpose,  
20 the abovementioned apparatus nevertheless suffers a number of shortcomings.

In particular, in order to dump a loaded bucket, a substantial amount of energy is required to elevate either the front of

the loaded bucket relative to the rear or vice versa.

The main problem, however, in a three rope system is that while theoretically providing a greater degree of control over the bucket carry angle over a greater boom slew radius, implementation  
5 of a control system to manage the relative rope tensions is considered to be an extremely difficult task.

Accordingly, it is an aim of the present invention to overcome or ameliorate at least some of the shortcomings or disadvantages of prior art dragline excavator control systems.

10 According to one aspect of the invention there is provided a dragline excavator bucket control system, said system comprising:

a pair of hoist ropes and a drag rope, said system characterized in that said hoist ropes are supported on said boom  
15 adjacent a free end thereof at spaced support positions and said hoist ropes are coupled adjacent opposite ends of a dragline bucket whereby said hoist ropes are substantially parallel and the line connecting said boom support points and the line connecting said bucket attachment points are substantially parallel when said bucket  
20 is in a substantially horizontal carry attitude.

Suitably said control system comprises a four point support system in side elevation forming a quadrilateral shape.

Preferably, in use, said four points of said support system define a substantially parallelogram shape.

Preferably said bucket, in use, is urged between a generally horizontal transport position and a dumping position by a dumping means, said dumping means being operable by lengthening one of said hoist ropes relative to the other hoist rope whereby gravitational forces alone cause movement of said bucket between a generally horizontal transport position and a dumping position.

Alternatively, the bucket, in use, is urged between a transport position and a dumping position by relative movement between spaced upper support positions for said hoist ropes.

If required, a self compensating hoist rope take up system restores the bucket to a carry position under the influence of potential energy stored in said hoist rope take up system.

The self compensating hoist rope take up system may comprise a suspended mass.

If required, the take up system may comprise a spring biasing means.

Alternatively, the take up system may comprise a hydraulic biasing means.

Suitably, said hydraulic system includes a pressure accumulating chamber.

Preferably, the self compensating take up system is selected from any combination of a suspended mass, a spring biasing means and/or a hydraulic biasing means.

In order that the invention may be more readily understood and put into practical effect, reference is now made to a preferred embodiment described in the accompanying drawings in which:

- FIG. 1 shows schematically in side elevation a conventional two rope bucket rigging system;
- 10 FIG. 2 shows schematically a prior art three rope 'triangulated' rigging proposal;
- FIG. 3 shows schematically in side elevation a parallel rigging system according to the invention;
- FIG. 4 shows one embodiment of a boom end adapted to support a pair of hoist ropes in a parallel configuration;
- 15 FIG. 5 shows an alternative embodiment of the arrangement of FIG. 4;
- FIG. 6 shows schematically a side elevational representation of a parallel bucket rigging;
- 20 FIG. 7 shows schematically the maintenance of bucket attitude as the drag rope is tensioned to move the bucket;
- FIG. 8 shows schematically one form of self compensating take up system for righting the bucket after dumping;

FIG. 9 shows an alternative to the embodiment of FIG. 8;

FIG. 10 shows yet another alternative to the device of FIG. 8 or FIG. 9;

FIG. 11 shows schematically a means of dumping a bucket by  
5 relative movement between upper supports of respective hoist ropes; and

FIG. 12 shows schematically an alternative means of dumping a bucket by changing relative hoist rope lengths.

FIG. 1 shows schematically a conventional bucket  
10 excavator rigging wherein excavator 1 comprises a support mast 2, a boom 3 and a bucket 4 supported on a hoist rope 5 in turn connected to a hoist rope winch (not shown).

Hoist rope 5 terminates in a coupling (not shown) which connects hoist chains 6 to trunnions 7 towards the rear end of bucket  
15 4. The coupling also connects a dump sheave 8 over which passes a dump control rope 9 connecting at one end to the arch 10 of bucket 4 and at its other end to a drag coupling (not shown) which couples the free end of a drag rope 11 to drag chains 12 connected to respective mounts (not shown) on bucket 4.

20 In use, the bucket carry angle is a function of the geometry of the various coupling points and respective tensions in the hoist rope, hoist chains, drag rope, drag chains and the control rope.

FIG. 2 shows schematically a three rope system of the type proposed in Australian Patent Application No 34502/89. In the drawings like reference numerals have been employed for like features.

5                   As can be seen, the use of an additional hoist rope 5 may permit substantial savings in rigging mass by dispensing with the heavy hoist coupling (or equalizer), dump sheave, dump chains and dump control rope etc.

FIG. 3 shows schematically a side elevational view of a  
10                   three rope system according to one aspect of the invention. Again, like reference numerals have been employed for like features.

In the embodiment shown a pair of hoist ropes 5, 5a are paid off opposite ends of a hoist winch (not shown) and respectively pass over a 'normal' boom sheave 20 and an 'extended' boom  
15                   sheave 21 and a second boom sheave 22 mounted coaxially with sheave 20.

'Extended' boom sheave 21 is mounted on a jib spacer frame 23 to space hoist ropes 5, 5a in a parallel manner as shown.

By suspending the bucket from front and rear trunnions  
20                   by parallel hoist ropes of effectively substantially equal length, it will be apparent that the bucket carry attitude will not be influenced to a great extent by drag rope tension and thus independent control of hoist ropes 5, 5a for maintaining bucket attitude is alleviated.

FIG. 4 shows schematically an enlarged view of the end of the boom illustrated in FIG. 3. The jib spacer frame 23 is rigidly mounted on boom 3.

FIG. 5 shows an alternative embodiment to the arrangement of FIG. 4 wherein the jib spacer frame 23 is pivotally mounted at its inner end 23a to boom 3.

The angular position of frame 23, and thus the relative spacing between hoist ropes 5, 5a, may be adjustable by a tensionable cable 24 which extends over a spacer arm 25 attached to frame 23 and pivotable therewith. By adjusting the relative spacing between hoist ropes 5, 5a a parallel rope support can be provided for the bucket over a substantial extend of the boom to maximize bucket carrying capacity and to extend both excavation and dump radii.

FIG. 6 shows in a schematic sense the parallelogram shape defined by the four support points for the bucket.

Point A represents sheave 22, point B represents sheave 21 as shown in FIGS. 3, 4 and 5, while points C and D represent respectively front and rear bucket trunnions.

FIG. 7 shows that as the drag rope 11 is tensioned to carry the bucket inwardly and upwardly to the position shown in phantom, the angle of the front and rear bucket trunnions, represented by the line extending between points C and D, remains substantially constant.

FIG. 8 shows a suspended mass 30 coupled, say, to hoist rope 5a via a pair of fixed sheaves 31 attached to the excavator (not shown) and a floating sheave 32 to which the mass 30 is attached.

5                   With floating sheave 32 in an extended position as shown to take up slack in rope 5a, a sheave brake (not shown) or other suitable rope braking mechanism associated with fixed sheave 31 is engaged to retain the fixed and floating sheaves 31, 32 in their relative positions in turn to maintain the bucket carry attitude as  
10 shown generally in FIGS. 6 and 8.

When the bucket is full and positioned over a desired dump zone, the sheave brake associated with sheave 31 is disengaged to allow rope 5a to be paid out.

As rope 5 is stationary and maintains a fixed tension on  
15 the winch drum, the gravitational force of the loaded bucket forward of the rear hoist trunnions is such as to cause the bucket to tilt about the rear hoist trunnions as the tension in the rope 5a overcomes the restoring force of mass 30. The bucket rotates about its rear trunnions to an upright position to dump its load and when the bucket  
20 is empty, the mass 30 is sufficient to apply a restoring force against the forward portion of the bucket to take up slack in rope 5a to return the bucket to a normal carry position to continue the excavation process. Once the bucket has returned to the normal carry attitude,

the sheave brake, or the like, is again engaged to lock the take up system.

FIG. 9 shows an alternative embodiment of the system of FIG. 8. In this embodiment, the mass 30 is reduced and is  
5 combined with a spring mechanism 33 which, when compressed, provides a restoring force to return the bucket to its normal carry attitude. The spring mechanism may, for example, comprise a compression/tension spring of fixed or variable rate and include a  
10 damper during pay out or take up of slack during the bucket dump and restoration steps.

FIG. 10 shows yet another embodiment incorporating a mass 30, a hydraulic piston/cylinder assembly 34 and a pressure accumulator 35.

Like the apparatus of FIGS. 8 and 9, the restoring forces  
15 of mass 30 and the pressurized accumulator 35 are sufficient to return an empty bucket to its normal carry attitude but are insufficient to resist the tensile load applied to rope 5a when the bucket is full. The hydraulic mechanism of FIG. 10 can be adapted to provide finely  
20 tuned dumping in both the cable slack pay out and take up modes. The hydraulic mechanism can also be used to provide the sheave locking functions.

FIGS. 11 and 12 show schematically the alternative bucket dumping modes according to the invention.

In FIG. 11 the parallelogram shape represented by points A B C D will move to the parallelogram shape represented by points A C E F when the upper support points A and B are rotated relative to each other. For example, this dumping mode may be effected by the  
5 embodiment of FIG. 5 where the take up mechanism is coupled to control cable 24 to move support point B in the parallelogram shape.

While FIG. 11 shows pivoting of support points about point A, the pivoting could be about any point between points A and B, or near them. Some pivot points, in particular, will allow dumping  
10 and return to the desired carry angle through the balance of forces on the full and empty buckets and without extra power application required.

FIG. 12 shows the change from carry attitude parallelogram points A B C D to dump trapezium points A B G H when  
15 the relative lengths of support ropes 5, 5a change. In this embodiment, any of the take up units of FIGS. 8, 9 or 10 could be employed to cause hoist rope 5a to lengthen to enable the bucket to dump its load.

From the foregoing description it will be apparent that  
20 the 'parallel' rigging arrangement in combination with the cable take up unit provides substantial improvements over prior art dragline bucket rigging systems. These improvements include increased bucket payload through reduced rigging mass, increased efficiency

through reduced spillage from the bucket, greater excavator range and greater dump zone range.

Possible the most significant advantage is that with relatively inexpensive adaptations to a conventional dragline excavator, all of the above improvements may be achieved along with a more energy efficient bucket dumping method which relies on the potential energy in a loaded bucket to dump the load and stored potential energy in a rope take up system to restore the bucket automatically to the correct carry attitude.

It readily will be apparent to a person skilled in the art that many modifications and variations may be made to the various embodiments described herein without departing from the spirit and scope of the invention.

For example, the excavator may include a single hoist rope winch with a single drive for a pair of hoist ropes. Alternatively, the winch may include multiple drums with independent drives or combinations thereof. In such an example, the winch drums may be operated in unison for the dig and carry operations and separately to control dumping functions and/or carry angle of the bucket.

DATED this Thirteenth day of April 2000.

GROUND BREAKING INNOVATIONS PTY LTD

By their Patent Attorneys

FISHER ADAMS KELLY

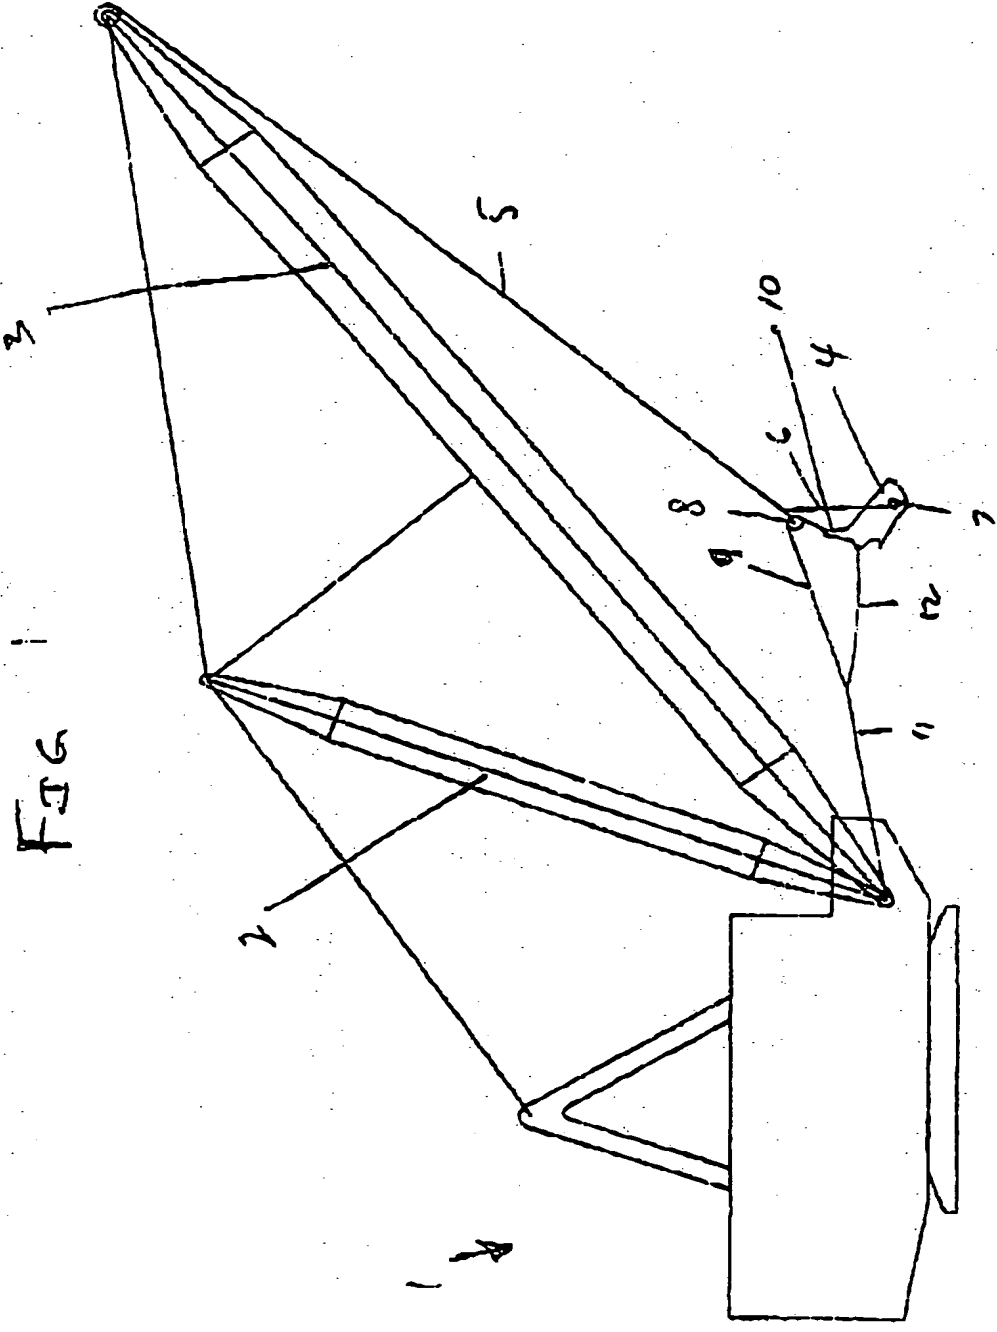


FIG 1

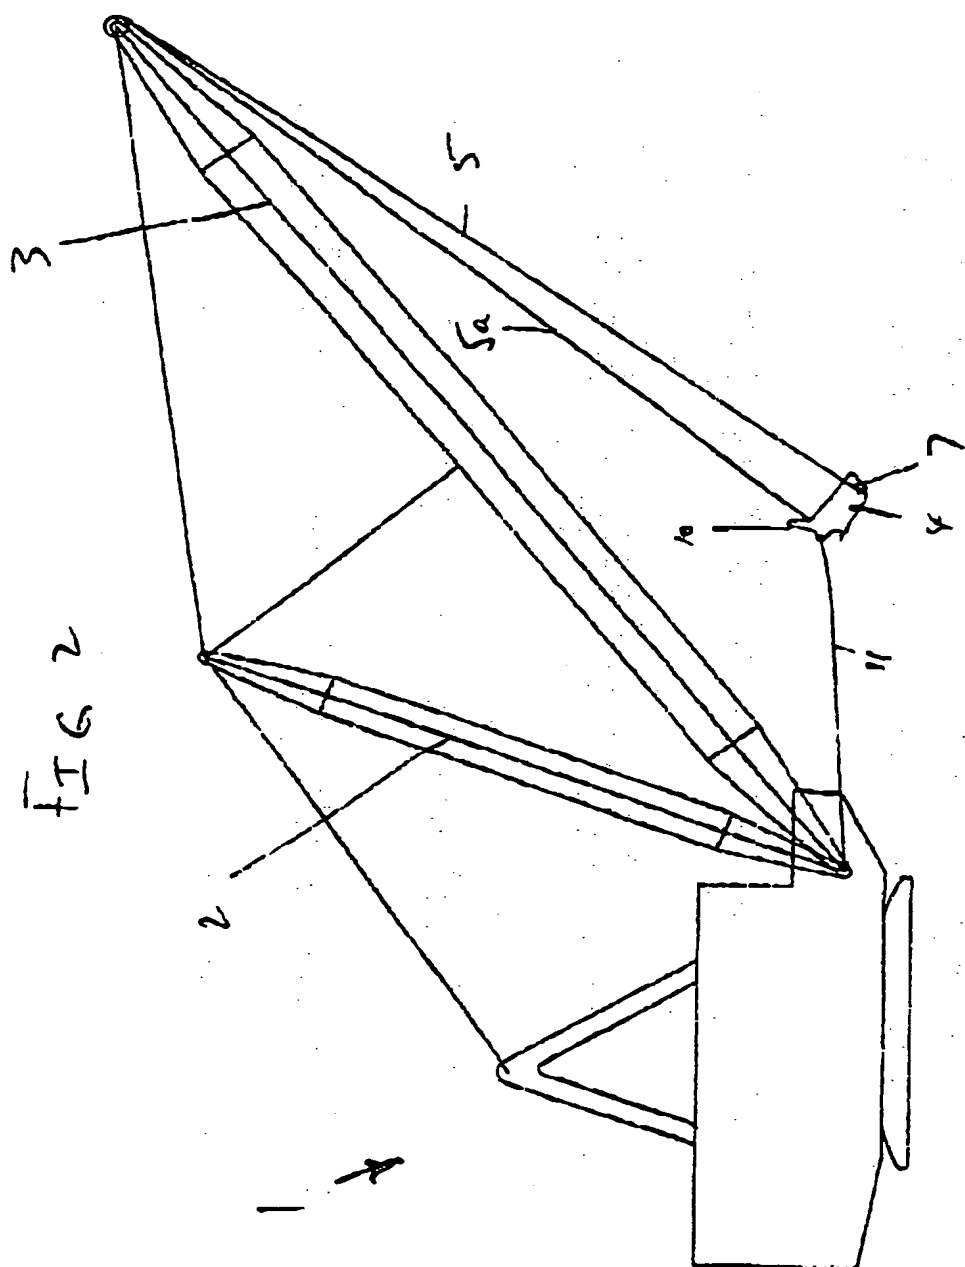
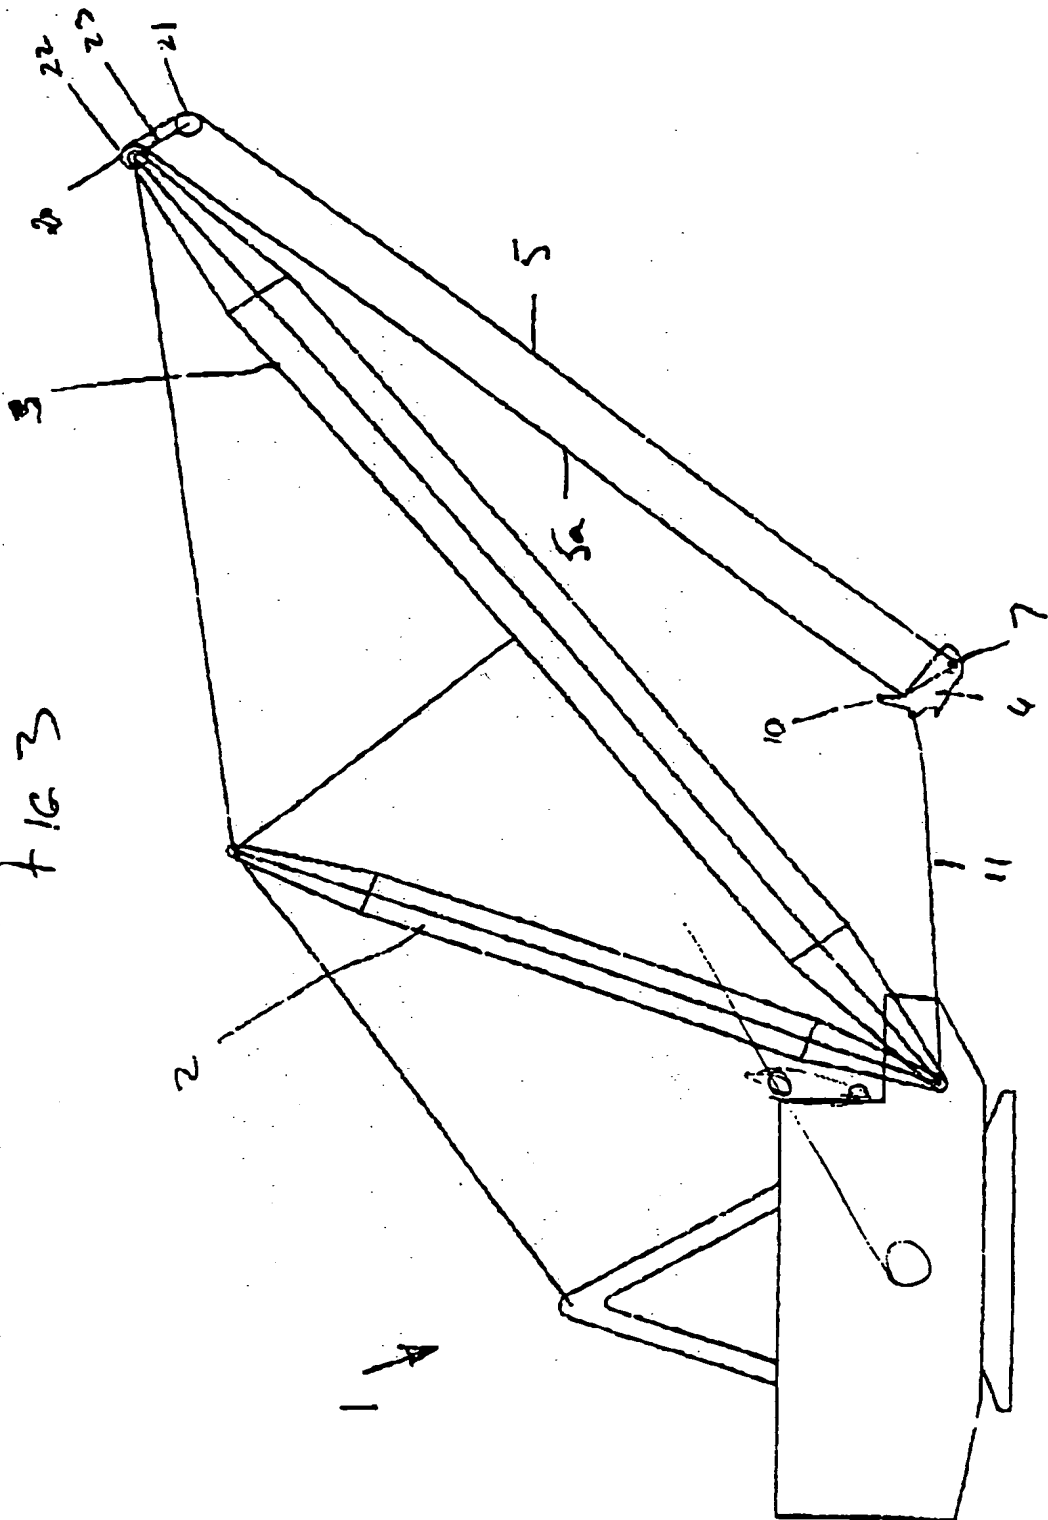
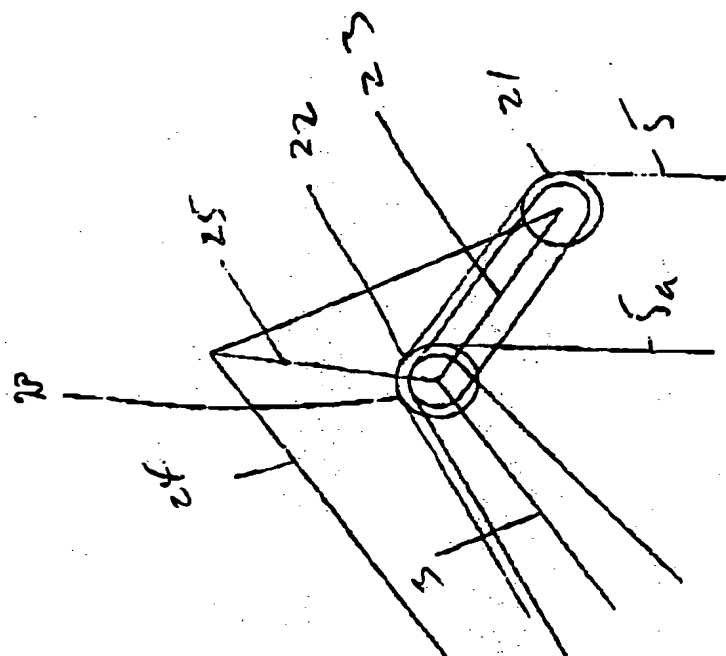
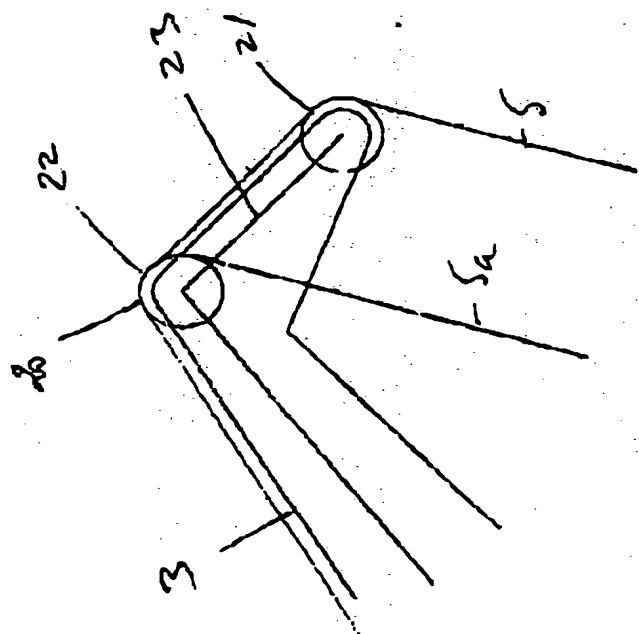


FIG 3





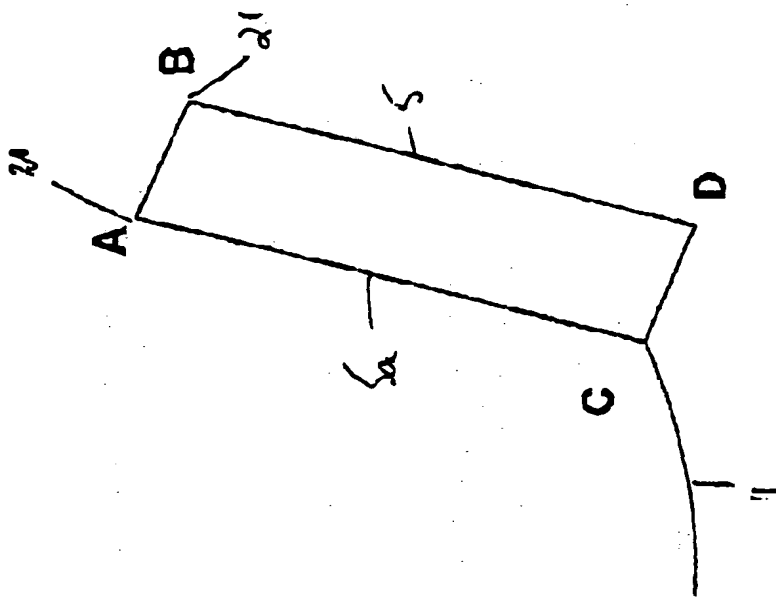


FIG 6

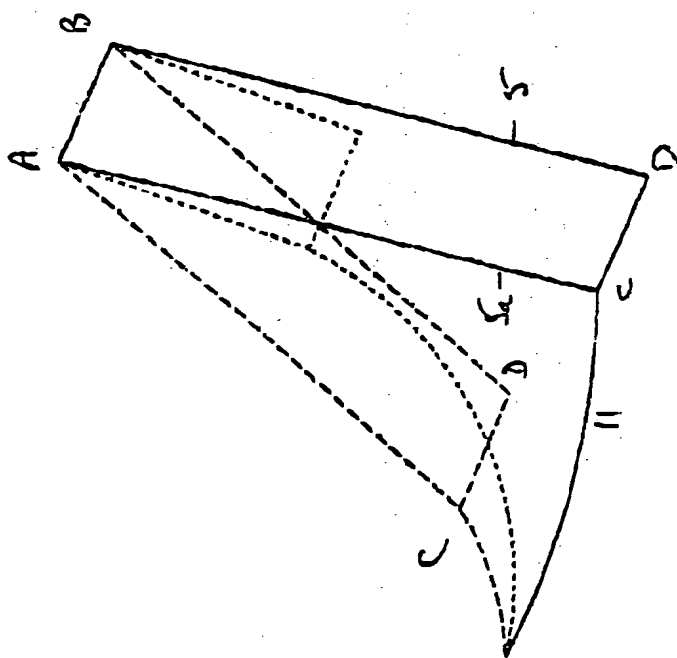


FIG 7

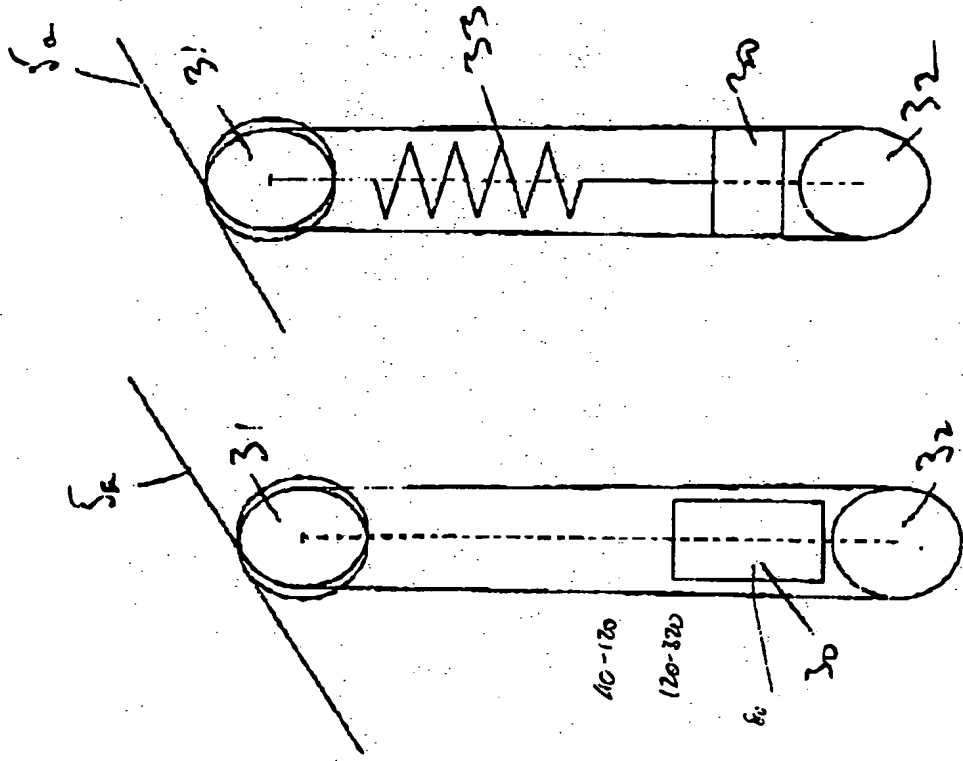


FIG 8

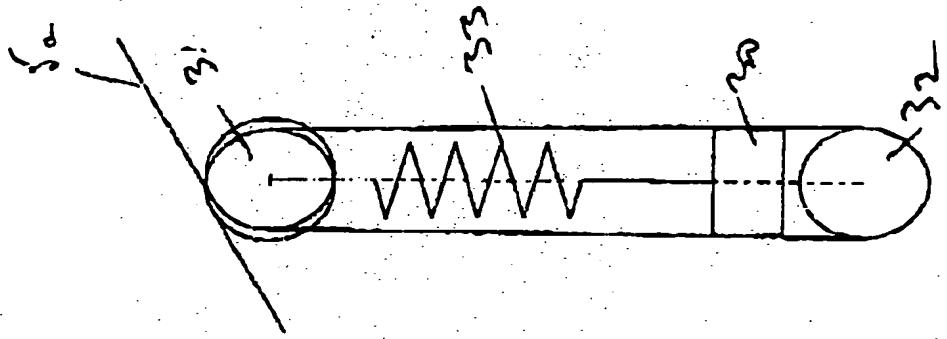


FIG 9

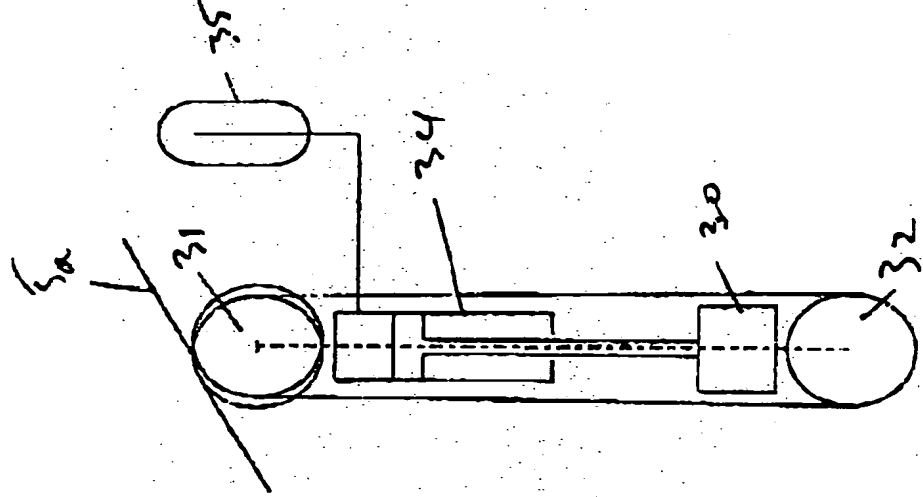


FIG 10

40 20 - 60  
120 60 - 150, 160

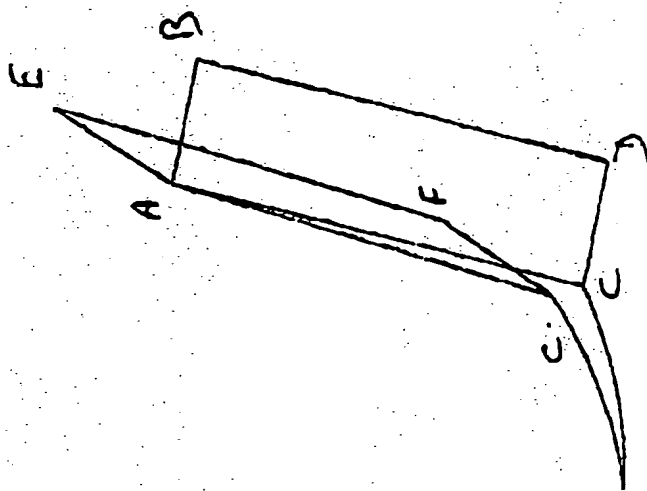


FIG 11

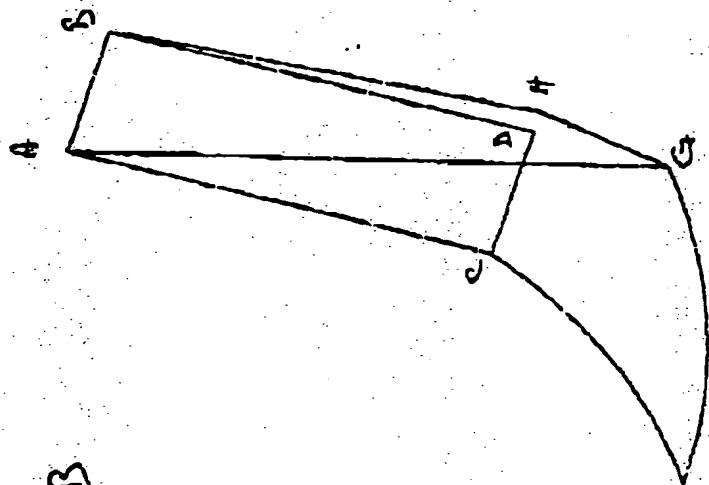


FIG 12